

Aboveground LPG tanks

Safety:

Aboveground LPG tanks from CGH fulfill safety requirements of propane and butane storage. We hold all necessary certificates to manufacture such tanks issued by Notified Body.

Outer surface:

Abrasive grit-blasted to grade Sa 2,5 according to EN-ISO 8501-1 and painted in C3M standard or higher.

LPG tanks are made of carbon steel and are equipped with access manholes and covers with fittings. Connections and flanges used are provided by well-known qualified producers.

CE Certificate

Technical data:

- Production according to PED/2014/68/UE directive, using AD 2000 or EN 13445 standards
- Pressure: 15,6 bar
- Working temperature: -20/+40°C
- Other conditions on request

Nominal volume*	Dimensions		Weight
	diameter	length	
[m³]	[mm]	[mm]	[kg]
9,0	1250	7 650	1 750
9,9	1600	5 350	2 350
15	1600	7 850	3 150
9,9	2000	3 550	2 350
15	2000	5 050	3 050
21	2000	7 050	3 950
30	2000	10 050	5 400
52	2500	11 300	8 750
62	2500	13 300	10 250
71	2500	15 300	11 650
98	2900	15 500	16 200
110	2900	17 500	18 050
75	3200	10 750	17 600
150	3200	19 750	27 700
200	3200	26 750	37 800

*In-between sizes are possible.






Project Hungary: 30 m³, Ø 2000 mm



Project Nigeria: 45 m³, Ø 2500 mm



Project Portugal: 100 m³, Ø 2900 mm

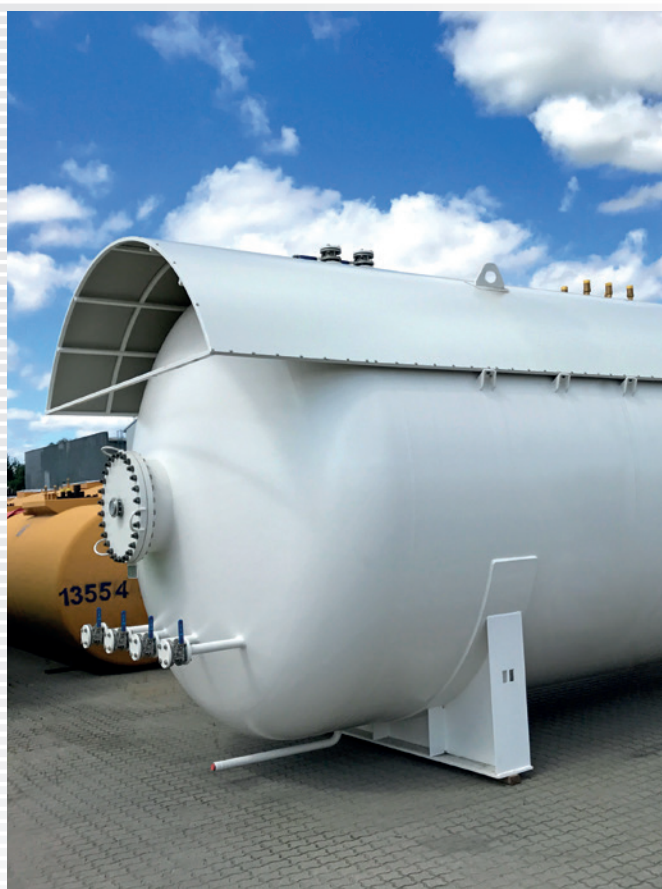

Project Ghana: 75 m³, Ø 3400 mm

